


→ SYSTEM-KIT 90000.0002.7545



No Transport of persons and goods in dynamic operation

Lifting load max.	36 kN
Stroke length max. (*)	1.300 mm
Lifting speed appr.	660 mm/min.
Engine group (DIN 15020)	1Cm at load collective L3
Useful life (**)	400 h at T1 (<0,25h daily)
Operating standard	DIN EN ISO 14122 + MRL (CE)
Ambient temperature	5°C to +40°C
Protection class	IP 55
Performance Level	(PL)c
Supply voltage	230V 1~ / 50Hz 1,1 kW

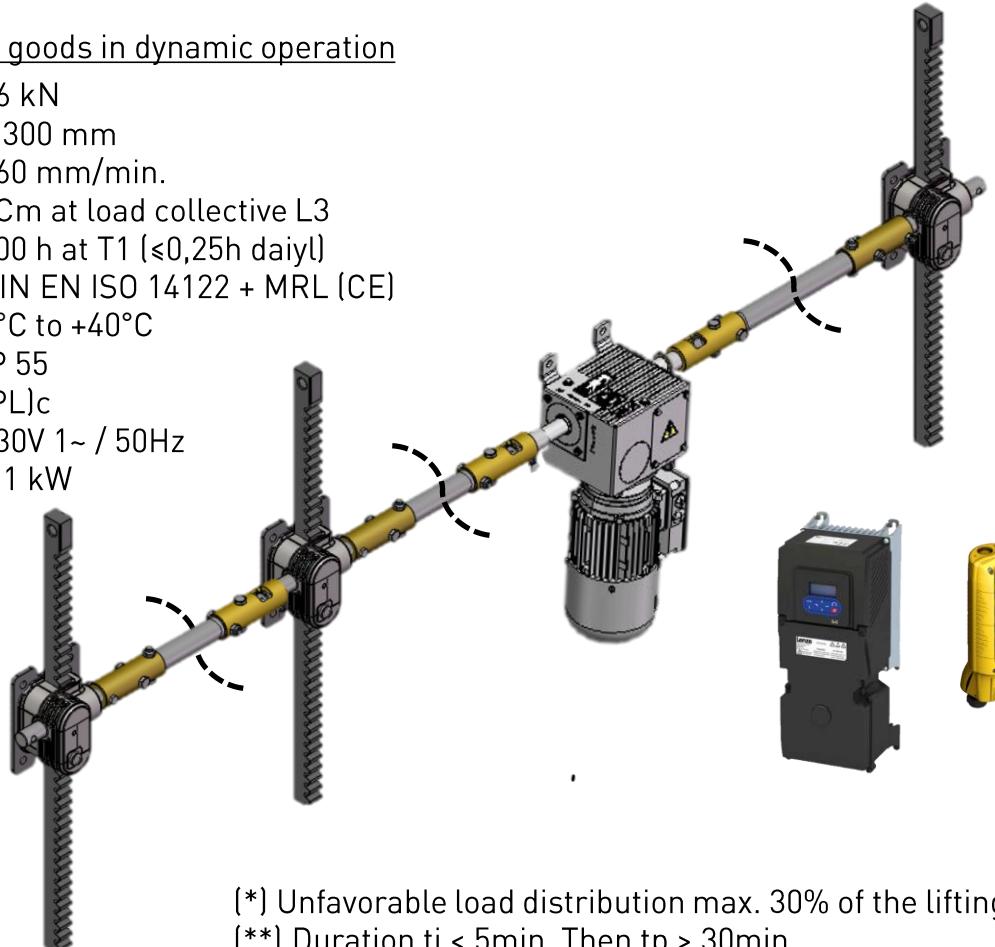

No transport of persons
In dynamic mode

(*) Unfavorable load distribution max. 30% of the lifting load each rack

(**) Duration $t_i < 5\text{min}$. Then $t_p > 30\text{min}$

CE conformity / risk analysis of the entire system is carried out by the customer

Connecting shaft
provided by the customer