


→ SYSTEM-KIT 90000.0002.7562




Transport of persons and goods in dynamic operation

| | |
|--------------------------|--|
| Lifting load max. | 12 kN |
| Stroke length max. (*) | 1.900 mm |
| Lifting speed appr. | 860 mm/min. |
| Engine group (DIN 15020) | 1Cm at load collective L3 |
| Useful life (**) | 200 h at T1 (≤0,25h daily) |
| Operating standard | DIN EN 1570-1 / DIN EN 280 + MRL (CE) |
| Ambient temperature | -5°C to +50°C / Optional down to -25°C |
| / Control box | -25°C up to +40°C |
| Degree of protection | IP 55 |
| Performance Level | (PL)c |
| Supply voltage | 230V 1~ / 50Hz / 2,2 KW |
| Shaft speed | 120 U/min. |
| (Gearbox output) | |

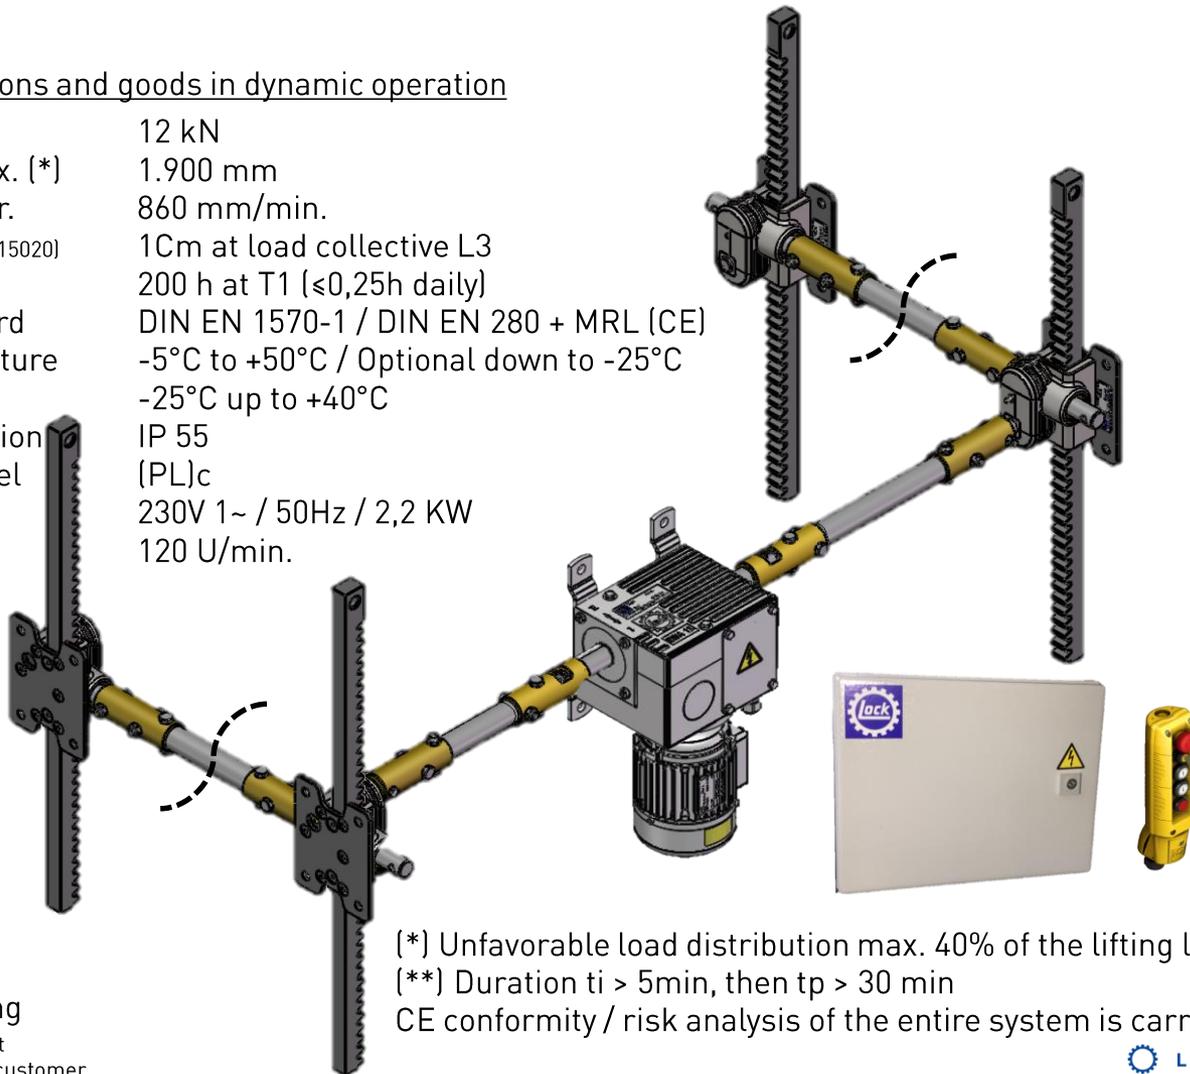

Transport of persons
In dynamic mode

 = Erweiterung
Connecting shaft
provided by the customer

(*) Unfavorable load distribution max. 40% of the lifting load each rack

(**) Duration $t_i > 5\text{min}$, then $t_p > 30\text{min}$

CE conformity / risk analysis of the entire system is carried out by the customer