

# → SYSTEM-KIT 90000.0002.7564



## Transport of persons and goods in dynamic operation


Lifting load max.	21 kN
Stroke length max. (*)	1.800 mm
Lifting speed appr.	860 mm/min.
Engine group (DIN 15020)	1Cm at load collective L3
Useful life (**)	200 h at T1 (<0,25h daily)
Operating standard	DIN EN 1570-1 / DIN EN 280 + MRL (CE)
Ambient temperature / Control box	-5°C to +50°C / Optional down to -25°C -25°C up to +40°C
Degree of protection	IP 55
Performance Level	(PL)c
Supply voltage	230V 1~ / 50Hz / 2,2 KW
Shaft speed (Gearbox output)	120 U/min.

(\*) Unfavorable load distribution  
max. 30% of the lifting load each rack

(\*\*) Duration  $t_i > 5\text{min}$ , then  $t_p > 30\text{ min}$

CE conformity / risk analysis of the entire system is carried out by the customer

= Erweiterung  
Connecting shaft provided by the customer

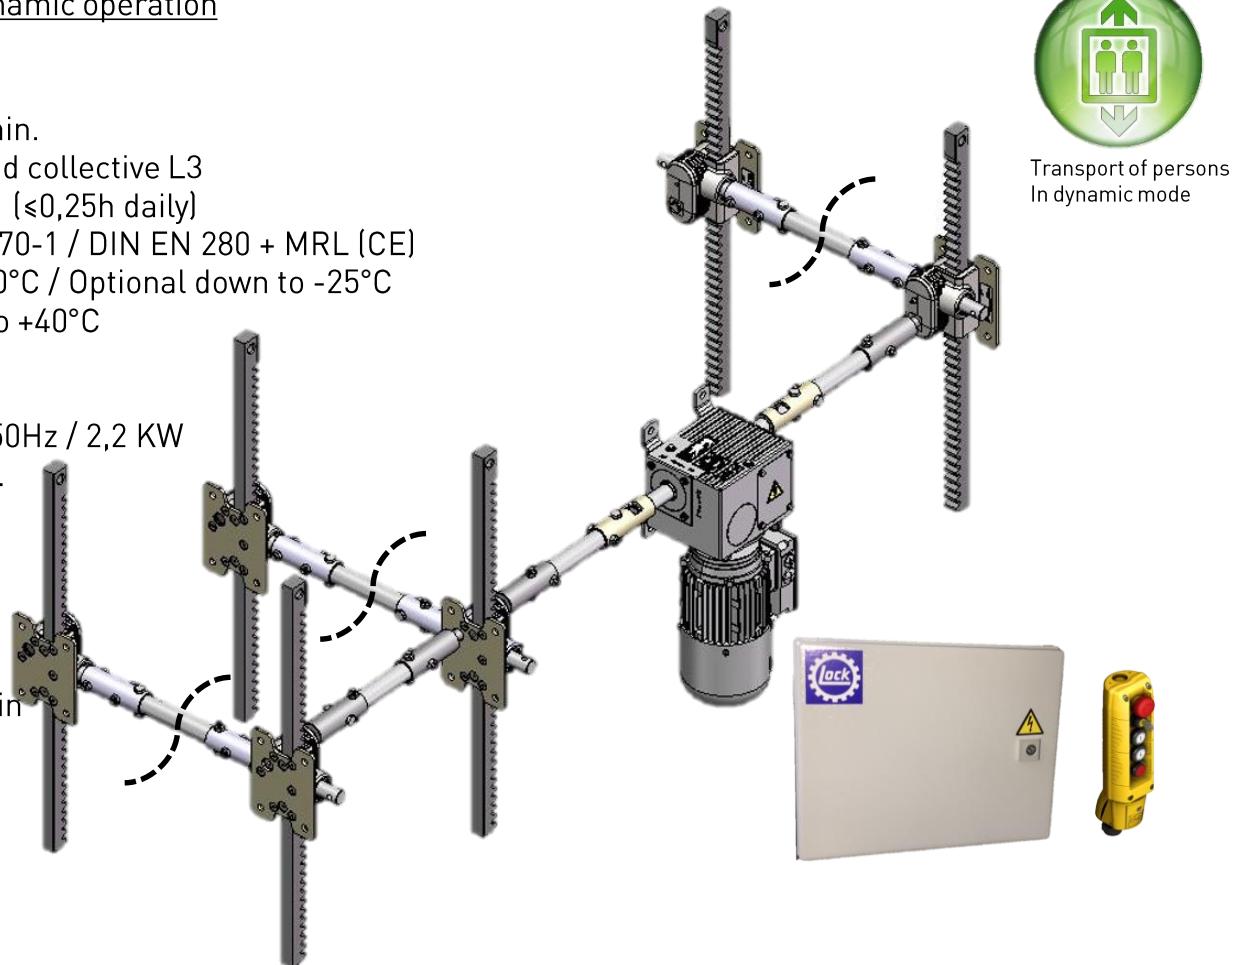

Transport of persons  
In dynamic mode