

→ SYSTEM-KIT 90000.0002.7565




No transport of persons and goods


Lifting load max.	4 kN
Stroke length max. (*)	1.850 mm
Lifting speed appr.	8 mm/n.
Engine group (DIN 15020)	1Cm at load collective L3
Useful life (**)	200 h at T1 (≤0,13h daily)
Operating standard	MRL (CE)
Ambient temperature	-5°C to +50°C / Optional down to -25°C



No transport of persons
In dynamic mode

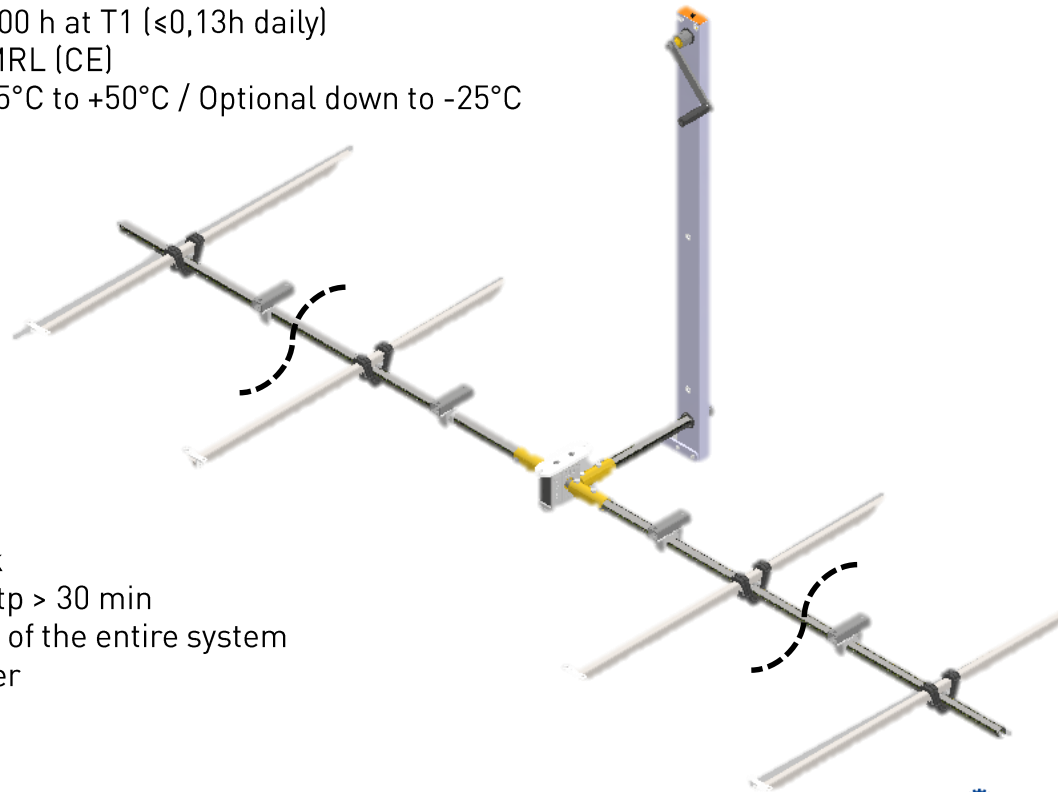

(*) max. 500N load each rack
(**) Duration $t_i > 5\text{min}$, then $t_p > 30\text{min}$
CE conformity / risk analysis of the entire system
is carried out by the customer

 = Erweiterung
Connecting shaft
provided by the customer